



May 11, 2016

**CITY OF PLANT CITY
Purchasing Department
(813) 659-4270**

ADDENDUM 4

**IFB No. 16 016UO-DB
Sanitary Sewer Lining Project**

***Bidders are required to acknowledge this addendum in their bid response**

The following is additional information, clarifications, questions and responses related to the above referenced IFB.

ADDITIONAL INFORMATION AND CLARIFICATIONS

ITEM NO. 1

This addendum adds the following areas of work to be performed.

Area 12 – The work to be performed as follows:

Install cured in place pipe, lining 625 linear feet of 12-inch and 1130 linear feet of 8-inch VCP gravity sanitary sewer main within the right-of-way of Reynold Street (SR 574). The individual sewer runs are listed below:

<u>Pipe No.</u>	<u>Pipe ID</u>	<u>Manhole</u>	<u>Manhole</u>	<u>Length</u>
1	P-4-637	4-637	4-636	325
2	P-4-636	4-636	4-635	300
3	P-4-633	4-632	4-633	320
4	P-4-634	4-633	4-634	275
5	No ID	5-160	5-161	275
6	No ID	xx-xx	5-xx	260

Install cured in place pipe, lining as many as 26 service laterals including clean-outs and seal service laterals to main line.

The extent of the lining is shown on Attachment 11.

Area 13 – The work to be performed as follows:

Install cured in place pipe, lining 350 linear feet of 8-inch steel gravity sanitary sewer main within the right-of-way of Alexander Street and Reynolds Street (SR 39 and SR 574). The individual sewer runs are listed below:

Pipe No.	Pipe ID	Manhole	Manhole	Length
1	P-4-192	4-191	4-192	50
2	P-4-191	4-190	4-191	300

Install cured in place pipe, lining as many as 3 service laterals including clean-outs and seal service laterals to main line.

The extent of the lining is shown on Attachment 12.

The bid sheet attached contains separate line items for Areas 12 & 13 due to the higher maintenance of traffic requirement for Florida Department of Transportation roadways

ITEM NO. 2

Section 10 – Bid Form The original bid document is being replaced with the following:

Section 10 - Bid Form

Pursuant to and in compliance with your Invitation For Bids, Instruction to Bidders, the fixed Price Construction Contract between Owner and Contractor, Special Conditions and other documents related thereto, the undersigned does hereby propose to furnish all labor, materials and other equipment necessary to complete the construction of the SANITARY SEWER LINING PROJECT 2016. The project is the installation of Cured in Place Pipe lining of the gravity sanitary sewer lines and service laterals. The lining is to be performed at ten (10) different locations within the City within rights-of-way and easements. The project includes lining of service laterals connected to those lines and installation of cleanouts at the right-of-way line or easement boundary where a cleanout does not exist. All work is to be performed in accordance with the City of Plant City Standards, complete and ready to use; as required by and in strict accordance with the contract documents, technical specifications, drawings and all addenda, if any issued prior to the date of this proposal at the prices listed herein as follows:

ITEM NO.	DESCRIPTION	QTY	UNIT	UNIT PRICE	ITEM COST
1	Mobilization and Demobilization	1	LS		

2	Bonds, Insurance and Indemnification	1	LS		
3	By-Pass Pumping	1	LS		
4	Maintenance of Traffic	1	LS		
5	Line 8-inch VCP Gravity Sewer Main	19,106	LF		
6	Line 10-inch VCP Gravity Sewer Main	0	LF		Unit price only
7	Line 12-inch VCP Gravity Sewer Main	0	LF		Unit price only
8	Line 16-inch VCP Gravity Sewer Main	0	LF		Unit price only
9	Line 18-inch VCP Gravity Sewer Main	0	LF		Unit price only
10	Line 20-inch VCP Gravity Sewer Main	0	LF		Unit price only
11	Line 24-inch VCP Gravity Sewer Main	838	LF		
12	Line 36-inch VCP Gravity Sewer Main	0	LF		Unit price only
13a	Line 4 or 6-inch Single Service	310	EA		
13b	Line 6-inch Double Service to Wye	20	EA		
13c	Construct Cleanout	344	EA		
14	Mechanical Pipe Cleaning 8"	0	LF		Unit price only
15	Mechanical Pipe Cleaning 10"	0	LF		Unit price only
16	Protruding Lateral Removal	0	EA		Unit price only
17	Point Repair	18	EA		

For Areas 12 & 13

ITEM NO.	DESCRIPTION	QTY	UNIT	UNIT PRICE	ITEM COST
18	By-Pass Pumping	1	LS		
19	Maintenance of Traffic	1	LS		
20	Line 8-inch VCP Gravity Sewer Main	1,480	LF		
21	Line 12-inch VCP Gravity Sewer Main	625	LF		
22a	Line 4 or 6-inch Single Service	21	EA		
22b	Line 6-inch Double Service to Wye	4	EA		
22c	Construct Cleanout	29	EA		
TOTAL COST* -----					\$

*** BASIS OF AWARD**

Total costs for the Sanitary Sewer Repair Project \$ _____


Total Price in Words _____


AUTHORIZED SIGNATURE: _____

DATE: _____

ITEM NO. 3

Attachments of Area 12 and 13

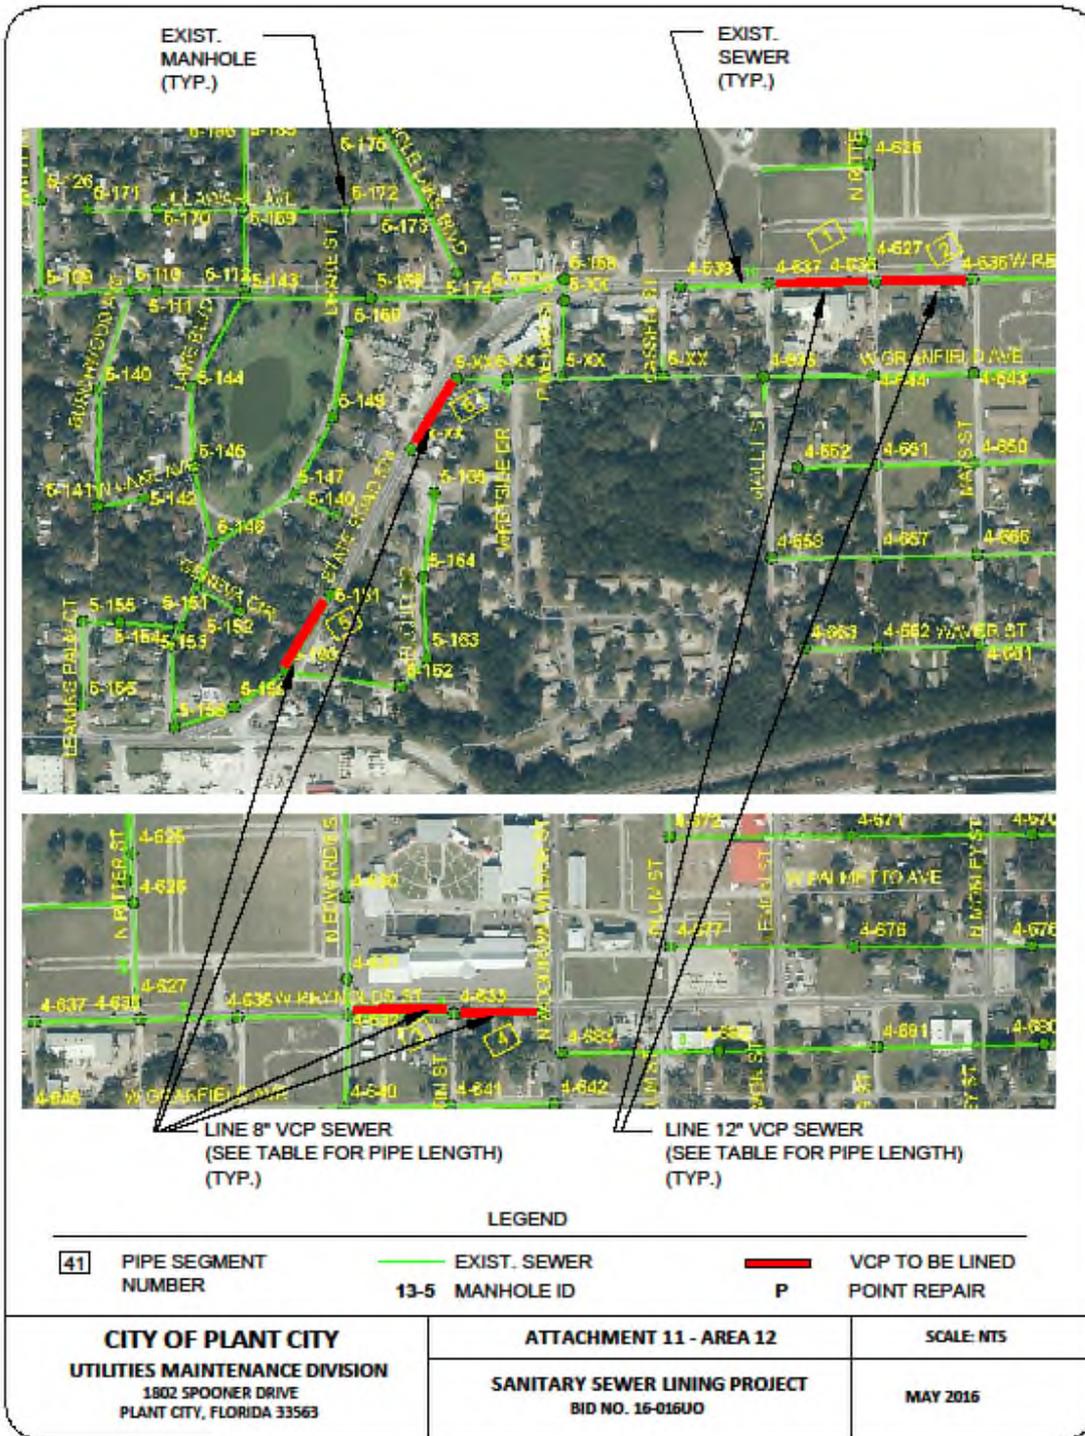

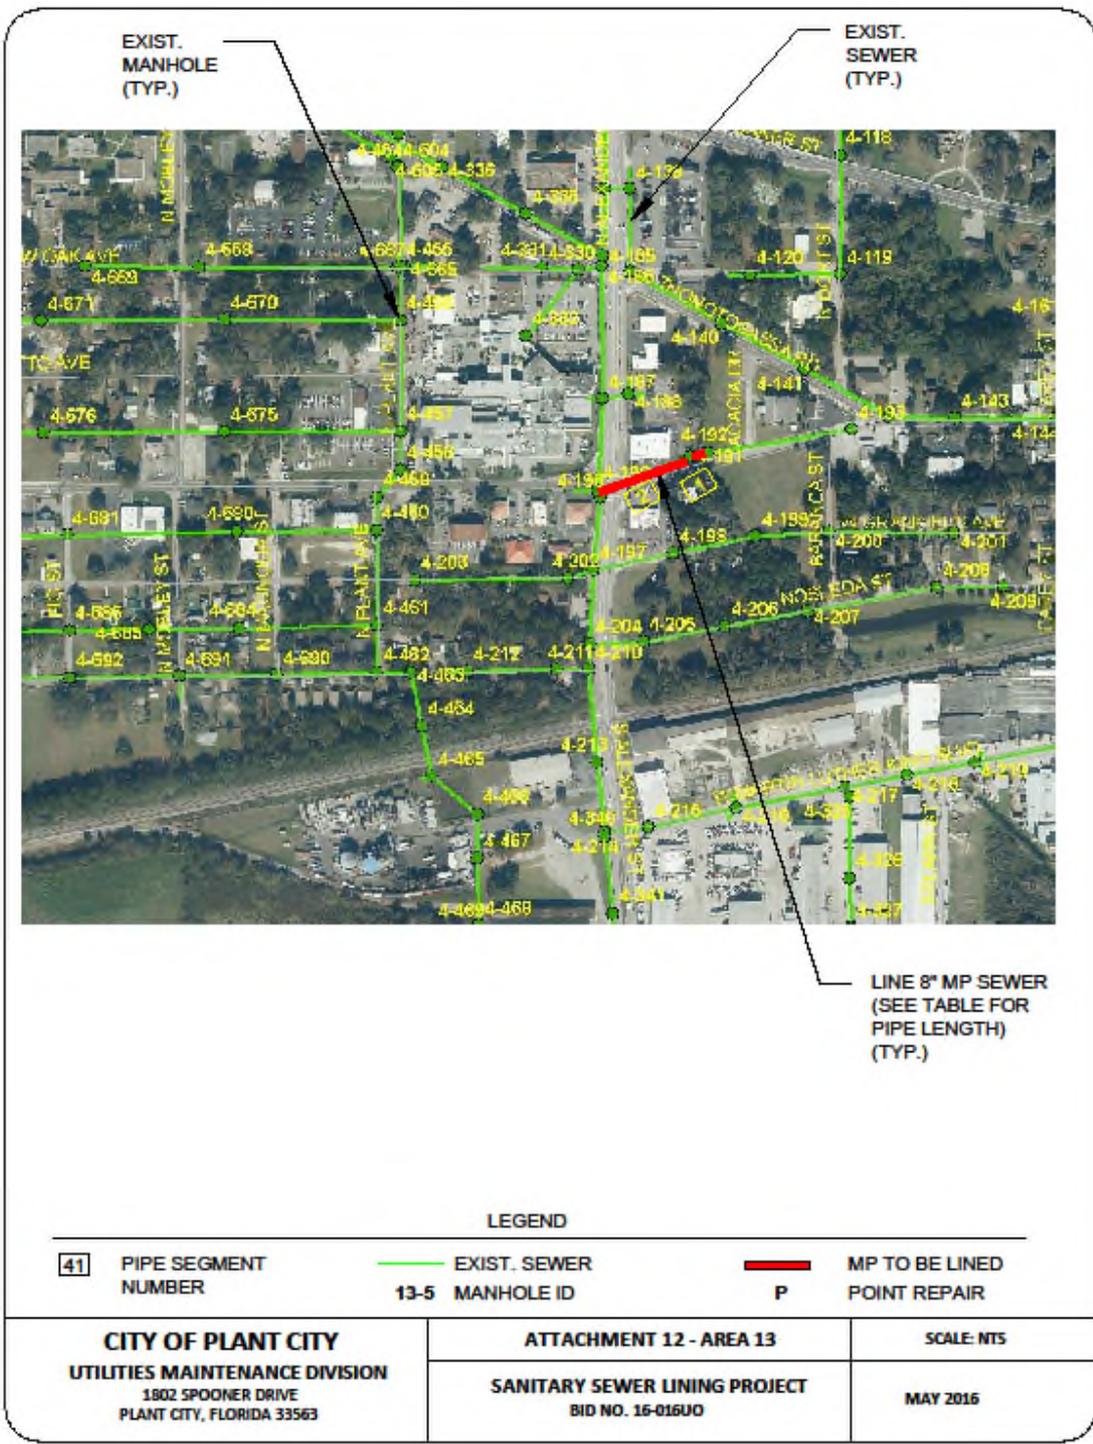

All other terms and conditions of the Bid Document remain unchanged.